

	GA	R	GCD&GA	RCD&R
5700BA	o	o	o	o
5702BA	o	o	o	o
5704BA	o	o	o	o

Showers – surface mounted

	GA	R	GCD	RCD
5700	o	o	o	o



5700BA

Thermostatic dual control shower/bath filler.

5702BA

Thermostatic triple control shower/bath filler with handspray on wall mounted cradle.

5704BA

Thermostatic triple control shower/bath filler with handspray mounted on slider/riser tube.

MASTERCRAFT
VERSION
AVAILABLE 



Shower control valves are available in GA and Regent styles and ceramic disc version of both. 1" filler control valve is only available in GA and Regent styles but will compliment whichever type is specified for above.

Valves are factory set to a maximum blend temperature of 43°C (110°F) – this can be re-set on site up to 50°C (122°F) if required.




TT5600

Thermostatic mixer with fixed overhead shower. MC version also available.

5700

Thermostatic mixer with fixed overhead shower and separate valve. Installation notes for 5702 also apply to 5700.

MASTERCRAFT
VERSION
AVAILABLE 

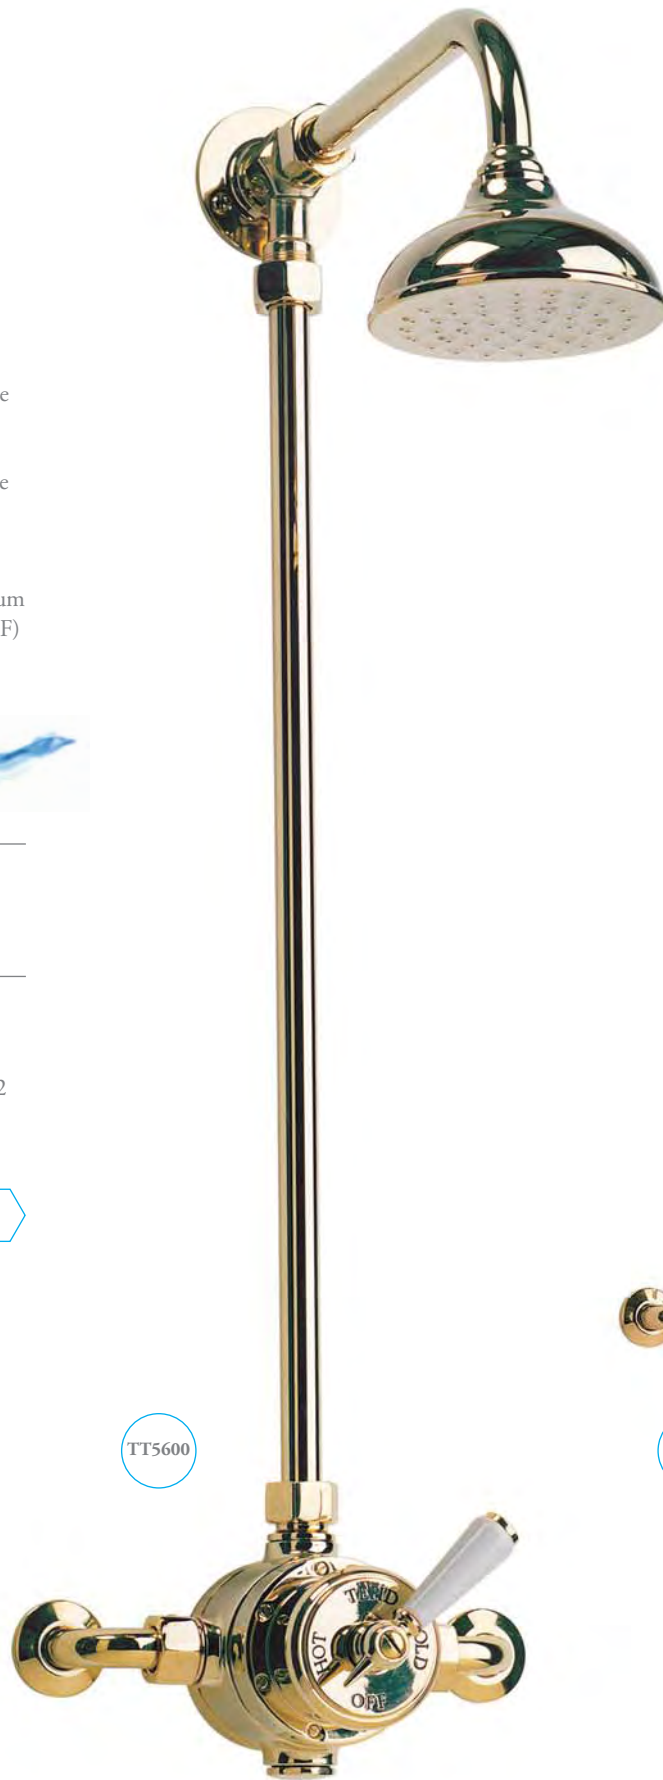

TT5600



5700